

Pressure gauges for mining

1252 Series



Application: To measure pressure in mechanized wall lining in mining.

Design: PN-88M-42304

Nominal size: Ø40; Ø50mm

Accuracy class: 2,5

Ranges: 0 ... 600 bar, 0 ... 60 MPa

Range of application: At steady pressure 75%, at fluctuating pressure 66% of dial range

Ambient temperature: -10 ... 50 °C

Case: Stainless steel

Dial: White painted aluminium with black markings

Window: Polycarbonate

Adapter: Brass


Movement: Brass

Connection: Bottom


Thread: Stecko DN6 or DN10

Options: -special dial

-customer's logo

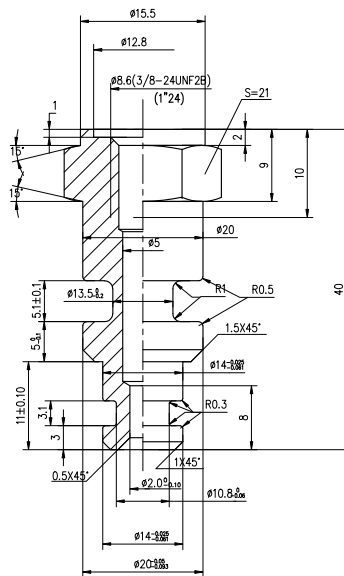

(DN10)

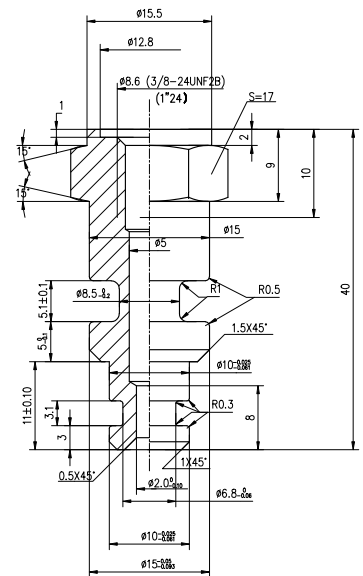

(DN6)